


# JIH-AUTO 3000

## AUTO SERIES

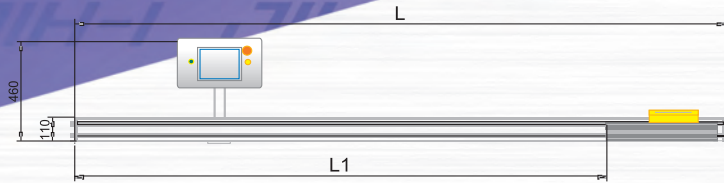

MODEL	JIH-AUTO 3000
Touch-sensing screen	7"
Servomotor	400 w
Max. memory	100 sets
Positioning speed	20~50 m / min
Positioning accuracy	±0.15 mm
Max. holding force	50 kgs
Max. pushing force	50 kgs
Feed speed (servo)	5-50 m / min

JIH-AUTO 3000	A	B	C	D	E
Length (L)	3,200 mm	4,200 mm	5,200 mm	6,200 mm	7,200 mm
Feed (L1)	2,500 mm	3,500 mm	4,500 mm	5,500 mm	6,500 mm

With Any Model Do It Automatic Positioning Or Automatic Feeding (Push)

# JIH-AUTO 20R

## NC FULLY AUTOMATIC ROTARY TABLE ANGULAR SAWING MACHINE



OPTIONAL: • Outfeed Roller Table • Chip Collector • Hydraulic Feeding

MODEL	JIH-AUTO 20R
Applicable machine	JIH-20R equipped with JIH-AUTO 3000
Automatic cutting angle	+45° ~ 0° ~ -45°
Sawblade sizes	20" x 1" bore
Spindle speed	2,800 R.P.M.
Motor	7.5 HP
Air pressure	4 ~ 6 kgs / cm <sup>2</sup>
Table area	920 x 650 mm
Table height from floor	875 mm
Rotary table drive servomotor	400 w
Feed drive servomotor	400 w (750 w opt.)

Max. feed length	3.2 ~ 7.2 m opt. (working size 2.5m ~ 6.5m opt.)
Positioning accuracy	±0.15 mm
Max. pushing force	50 kgs
Max. holding force	50 kgs
Positioning speed	20 ~ 50 m / min
Max. memory	100 sets
Touch-sensing screen	7"
Net / Gross weight	1,100 kgs / 1,400 kgs
Machine dim.(LxWxH)	8,400 x 1,100 x 1,850 mm
Packing dim.(LxWxH)	8,520 x 1,220 x 2,050 mm

# JIH-AUTO 18D

## NC AUTO SERIES



OPTIONAL:


- Ce Standard
- Infeed, Outfeed Roller Table
- Chip Collector
- Horizontal Clamp
- Hydraulic Feeding
- Saw BladeE



MODEL	JIH-AUTO 18D (Original Model JIH-455D)
Applicable machine	JIH-18 D TYPE (other models in Jih-18 series and JIH-24 series also can be equipped with JIH-AUTO3000 to convert it into an automatic feed cutting machine)
Cutting capacity (HxW)	120 x 120 mm 100 x 230 mm (Same as cutting capacity chart of model JIH-18C D TYPE)
Spindle motor	7.5 HP (10 HP opt.)
Sawblade size	18" x 1" bore
Table height from floor	860 mm

Air pressure	6~8 kgs / cm <sup>2</sup>
Touch-sensing screen	7"
Servomotor	400 w (750 w opt.)
Max. memory	100 sets
Positioning speed	20~50 m / min
Positioning accuracy	±0.15 mm
Max. holding force	50 kgs
Max. pushing force	50 kgs
Max. feed length	Opt. length 3.2 ~ 7.2 M (Working length 2.5~6.5 M)

JIH-AUTO 20R ± 0°~45°(45°~135° range of finished product)

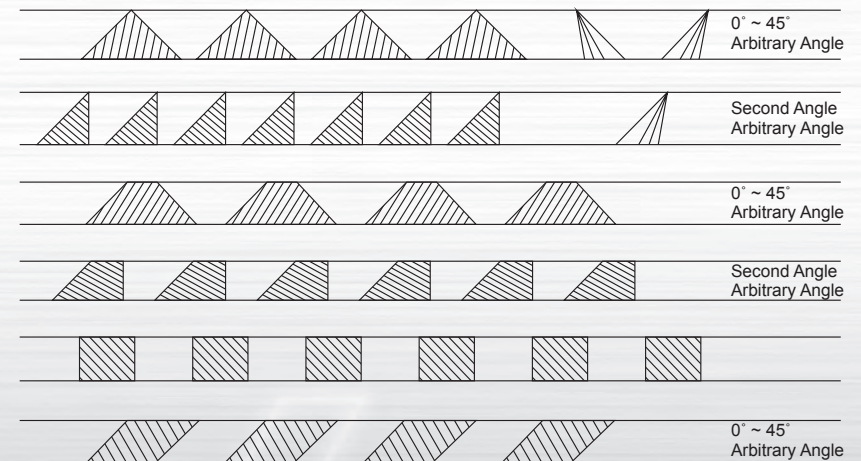

C2024  
C2030 0° ~ 60°