


JIH-T5


JIH-T5 5 Axis AUTOMATIC DOUBLE HEAD TILTING & ROTARY SAWING MACHINE




Special Design
For The Rotary Table




JIH-T5 Cutting Capacity Chart 24"Work Table rotary 90° Cutting Capacity Chart

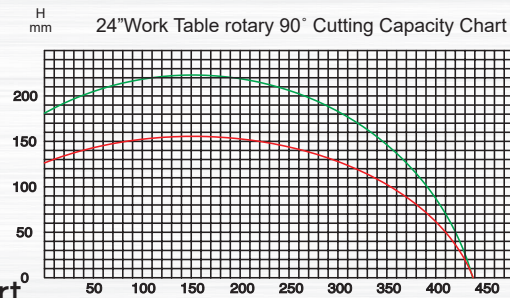

JIH-T5 Cutting Capacity Chart 24"Work Table rotary 45° Cutting Capacity Chart

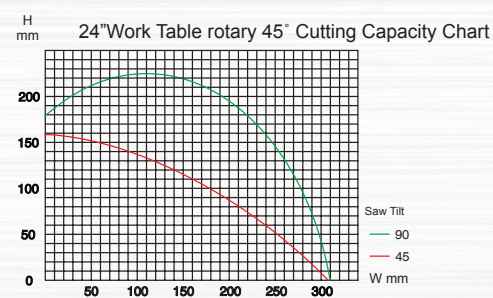


JIH-T5 Cutting Capacity Chart 24"Work Table rotary 67.5° Cutting Capacity Chart

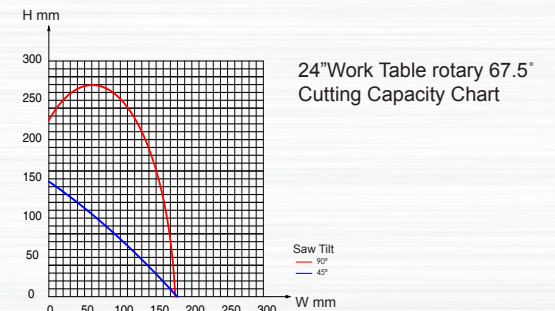


JIH-T5S Cutting Capacity Chart


JIH-T5S-26 Worktable Rotary 45° Cutting Capacity Chart

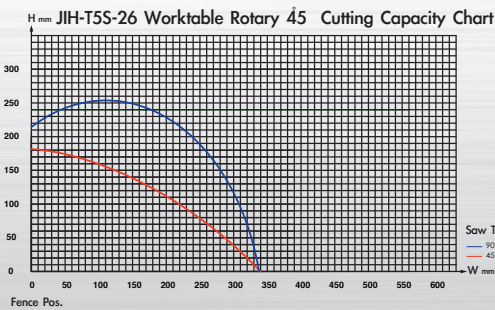


JIH-T5S-26 Worktable Rotary 90° Cutting Capacity Chart

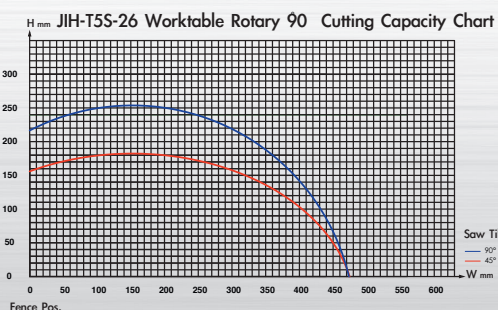

JIH-T5S-30 Worktable Rotary 45° Cutting Capacity Chart

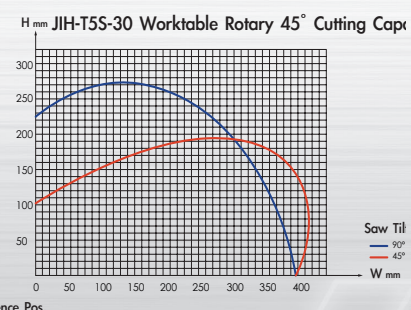

JIH-T5S-30 Worktable Rotary 90° Cutting Capacity Chart

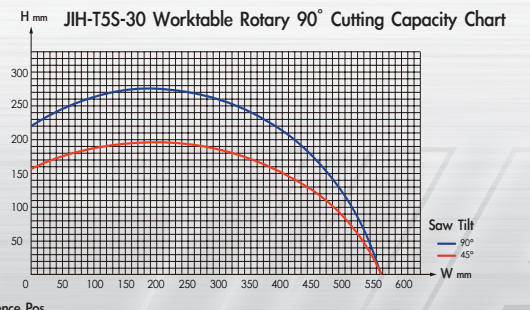




JIH-T5S-26

JIH-T5S AUTOMATIC DOUBLE HEAD TILTING & ROTARY SAWING MACHINE

1. Saw Tilting 0 ~ 45° Degrees Automatically.
2. Worktable Rotary $\pm 0 \sim 67.5^\circ$ Degrees Automatically.
3. Positioning Cutting Length Automatically.
4. 5 Axis Control By Servomotor, Operation By Touch Screen.
5. X Axis Moving By Linearing Guide Way To Ensure Accuracy For Positioning.
6. Mobile Saw Could Be Feeding And Cutting Automatically.

* Optional Auto 3000 Mobile saw could be feeding and cutting automatically.

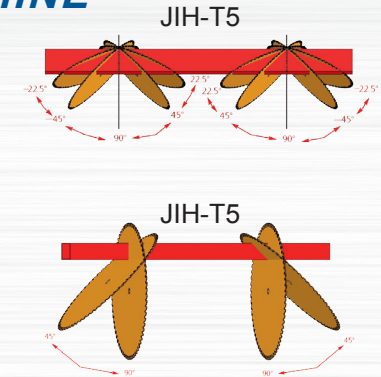

OPTIONAL: • Automatic Feeding (Push) • Chip Collector • Saw Blade

MODEL	JIH-T5-24	JIH-T5S-26	JIH-T5S-30
Control Mode Of Angle And Length	Servomotor Driver	NC Control Cutting Length	NC Control Cutting Length
Precision Of Length	± 0.15 mm	± 0.15 mm	± 0.15 mm
Precision Of Cutting Angle	$\pm 0.15^\circ$	$\pm 0.15^\circ$	$\pm 0.15^\circ$
Automatic Positioning Function	Yes	Opt. Connect With JIH-AUTO 3000	Opt. Connect With JIH-AUTO 3000
Cutting Capacity	For 90° Cuts:190 mm x 290 mm For 45° Cuts:130 mm x 310 mm Max. Cuts Length 4,500 mm(Opt.6,500 mm) Min. Cuts Length 530 mm When Table 90° And 90° Saw Tilt Min Cuts Length 810 mm When Table 45° And 45° Saw Tilt Min Cuts Length 830 mm When Table 67.5° And 45° Saw Tilt	For 90° Cuts:190 mm x 310 mm For 45° Cuts:130 mm x 310 mm (Check T5S-26 Cutting Capacity Chart)	For 90° Cuts:220 mm x 390 mm For 45° Cuts:160 mm x 390 mm (Check T5S-30 Cutting Capacity Chart)
Range Of Rotation Angle	22.5° ~ 90° ~ 157.5° ($\pm 0 \sim 67.5^\circ$)	45° ~ 90° ~ 135° ($\pm 0 \sim 45^\circ$)	45° ~ 90° ~ 135° ($\pm 0 \sim 45^\circ$)
Sawing Angle Mitre	45°-90° (0° ~ 45°)	45° - 90° (0° ~ 45°)	45° - 90° (0° ~ 45°)
Rotating Speed Of Main Motor	1,800 R.P.M.	1,500 R.P.M.	1,170 R.P.M.
Power Of Main Motor	7.5 Hp x 2	7.5 Hp (4P) x 1	10 Hp x 1
Servomotor	Saw Tilt (1 Kw) x 2, Saw Rotary (750 W) x 2, Length Positioning (1 Kw) x 1	Saw Tilt (1Kw) x 1, Saw Rotary (750W) x 1	Saw Tilt (1Kw) x 1, Saw Rotary (750W) x 1
Saw Blade Feeding / Returning Speed	Feeding 0 - 3 m / min Returning 2 - 3 m / min	Feeding 0 - 3 m / min Returning 2 - 3 m / min	Feeding 0 - 3 m / min Returning 2 - 3 m / min
Blade Size	24" x 1" x 120 T	26" x 1" x 120 T	30" x 2" x 120 T
Working Air Pressure	4 - 6 kgs	4 - 6 kgs	4 - 6 kgs
Machine Packing Dim. (L x W x H)	6,200 x 1,650 x 1,900 mm	2,060 x 1,810 x 1,760 mm	2,350 x 2,080 x 2,060 mm
Net / Gross weight	3,900 kgs / 4,300 kgs (6,500mm 4,400 kgs / 4,800 kgs)	1,050 kgs / 1,150 kgs	1,800 kgs / 2,000 kgs