


Aluminium working  
For all branches

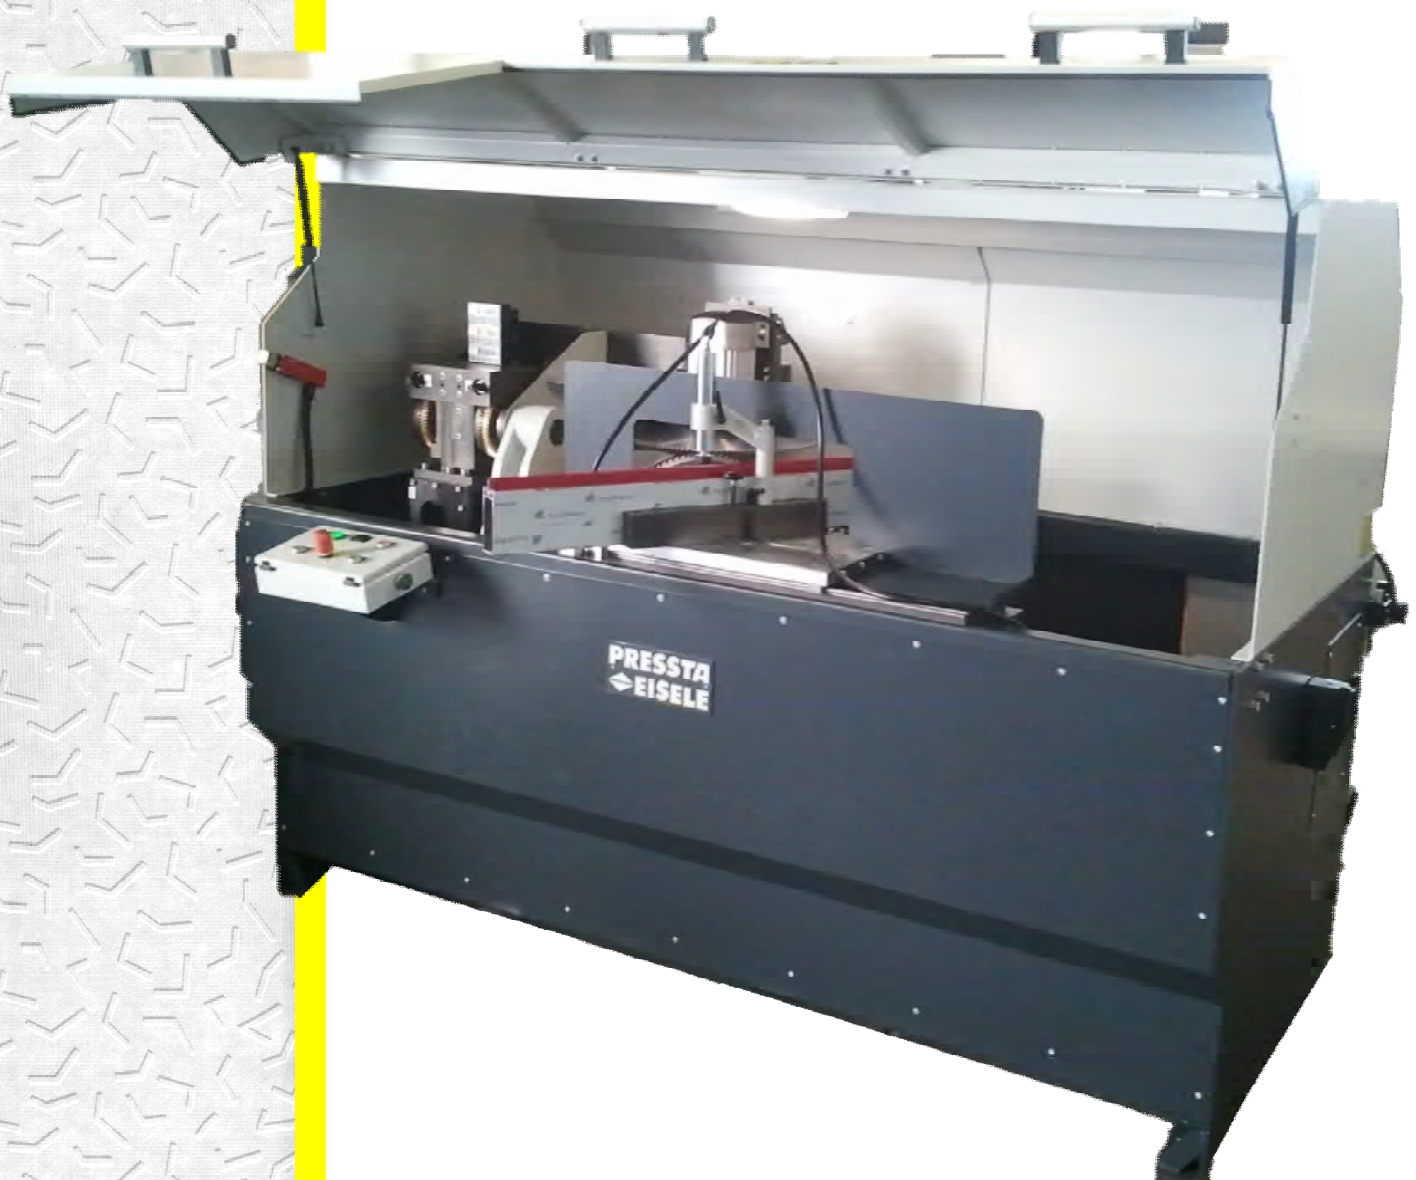

## Notching Saw Prisma 500

- Variable notching possibilities for mullion and transom combinations, e.g. curtain walls, winter garden, sky lights and special designs
- Manual adjustment of the horizontal blade max. 20mm to the front to cut slots
- Notch variation: rectangle, one sided angular, two sided angular, three sided angular
- Notch dimensions: **185mm** horizontal, and **210mm** vertical at (90°)
- Profile dimensions: height maximum 280mm, width maximum 300mm
- Manual adjustment of saw blade height, positioning via mechanical digital display; electronic display optional

**PRESSTA-EISELE GmbH**

Bergstrasse 9 • D 56859 Bullay • Tel. +49 (0) 65 42 / 93 62-0 • Email: [info@pressta-eisele.de](mailto:info@pressta-eisele.de)

# Aluminium working For all branches



- Swivelling range vertical saw blade 30°-90°-30° (back/mid/front) positioning via mechanical digital display
- Swivelling range of both, horizontal and vertical saw blade, 30°-90°-30°, positioning by mechanical digital display
- Material fence on the table swivelled left / right 30°-90°-30°, positioning by scale
- Depth stop adjustable via hand wheel and slide, read out by mechanical digital display, manual clamping
- Semi-automatic precise and safe notching due to the work piece is fixed on the table during the cut

## Technical Data:

Pressure:	5 - 6 bar
Power:	2 x 3 kW
Saw blades:	1 x Ø500 mm, 1 x Ø550 mm
Dimension:	approx. 2400 x 1750 x 1850 mm (LxWxH)
Working height:	approx. 1100 mm
Weight:	1150 Kg
Colour:	RAL 7016/7035

## PRESSTA-EISELE GmbH

Bergstrasse 9 • D 56859 Bullay • Tel. +49 (0) 65 42 / 93 62-0 • Email: info@pressta-eisele.de